



# CRANE SCALES

## CRS SERIES



**Model:**

CRS-5000/10000  
CRS-10000/20000  
CRS-15000/30000

### Product features

- ✓ Available in 10,000 ,20,000 and 30,000 lb capacities.
- ✓ Toggles between Kg and Lb
- ✓ Solid construction
- ✓ Rechargeable battery
- ✓ Ideal for steel industry

### Product highlights



Wireless Remote control



Highly visible display



Rugged structure

### Certifications



### Warranty








# CRANE SCALES

## CRS SERIES

### Dimensions

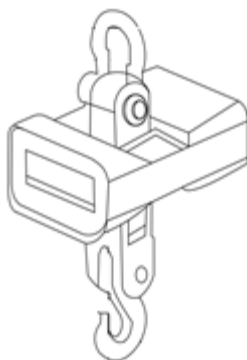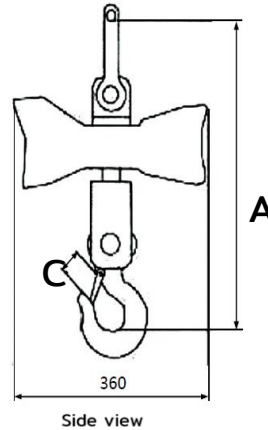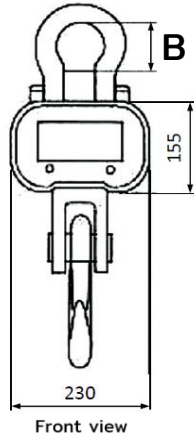

Isometric view

Table 1

MODEL	A	B	C	W	D	H
CRS 5000/10000	28.74 "	3.93 "	2.16 "	18.11 "	10.23 "	15.74 "
CRS-HD 10000/20000	33.46 "	4.72 "	2.70 "	22.84 "	11.02 "	17.71 "
CRS-HD 15000/30000	35.40 "	5.51 "	2.70 "	30.70 "	12.99 "	19.68 "

MODEL	Net weight	Total net weight	U.P.P	W.P.P
CRS 5000/10000	53.00 lb	62.00 lb	24	1525.00 lb
CRS-HD 10000/20000	97.00 lb	111.00 lb	16	1591.73 lb
CRS-HD 15000/30000	132.00 lb	167.00 lb	6	833.34 lb

Table 2

### Technical specifications

#### Dimensions

External dimensions	See table 1
Packing dimensions	See table 1 W, D, H
Net weight	See table 2
Total weight (packing included)	See table 2

#### Construction

Material	Steel construction.

#### Logistic data

Units per pallet	See table 2 U.P.P
Weight per pallet	See table 2 W.P.P
Dim. Per pallet	44.88" x 51.96" x 103.54"
Storage temperature	-4°F to 122°F (-20°C to 50°C)

#### Electrical data

Power supply	100-240 Vca / 47/63 Hz
Ampers	0.2 A
Cord length	70.86"
Lighting	LED
Plug type	NEMA-5-15P
Display	SSD display

#### Performance data

Capacity	11000.00 lb/ 22000.00 lb/ 35000 lb
Minimal division	5.00 lb/ 10.00 lb/ 10.00 lb
Max. Tare	11000.00 lb/ 22000.00 lb/ 35000 lb

#### Additional data

Operation temperature	14°F to 104°F (-10°C to 40°C)